Dock Applications

- 1. Open the box and pull out the light assembly, GFCI plug, 2lb weight, and 2 zipties.
- 2. Attach 2lb weight to the wire using the zipties.
- 3. Lower the weight into the water. The bulb unit will follow. Be sure to handle the bulb with caution.
- 4. Attach photocell to the top of the control box by inserting and twisting clockwise.
- 5. Plug GFCI plug into an approved GFCI outlet and enjoy!

Boat Applications

- 1. Follow steps 1 through 4 from dock application instructions.
- 2. The 2lb weight can either be attached to the wire, or to the top of the cage, depending on directional illumination preferences.
- 3. Plug system into a generator or a 1,000 watt inverter.

Warning!

If for any reason the system should cease to function, disconnect the unit immediately as a safety precaution, then call 855-FISH-LIGHT.


<u>DO NOT</u> press the reset button on the GFCI plug.


Extend the Life of Your System

While in the water, your system should run continuously each night for optimal results and self-cleaning. If taken out of the water, self-cleaning is unnecessary.

The bulbs must never be illumintaed out of the water. They run the risk of overheating.

Wire shield is the best way to protect against nicks in the wire caused by fish hooks or other aquatic life. Nicks in the wire are considered damage and not covered under the three-year manufacture warranty. You can purchase wire shield through our website.

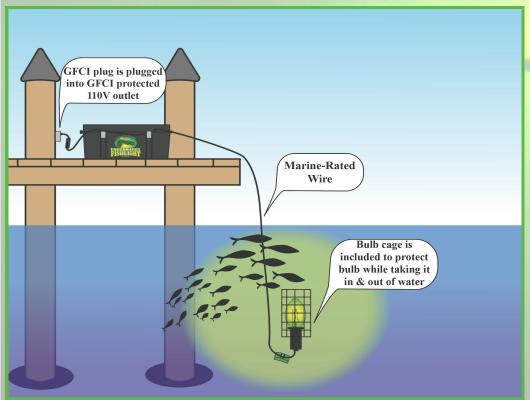

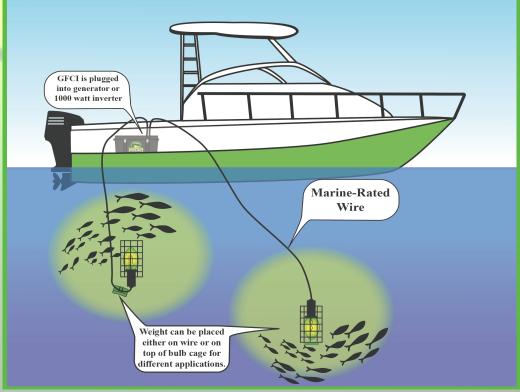



Thank you for your purchase!

We know you have many choices when it comes to underwater lighting, and we appreciate you choosing us!

What's in the box?

HID Light System including connected light assembly, control box, and GFCI plug

4 Zip Ties

2lb Weight

Photocell

Safety Disclaimer

We take every precaution to ensure that we are offering a safe and reliable product. Our lights include a built-in GFCI plug and are required to be plugged into a GFCI outlet at all times. Even with these safety features in place, we must insist that you do not swim around these lights while they are plugged in. This is true with any 110 volt lighting system. While the lights are designed and tested to shut down if there is any interruption of the power supply, the possible risk of shock/ injury/death is too great to take a chance. Please unplug the system(s) before entering the water. The manufacture/designer/seller of this product is not responsible for any injury/death/damage to property caused by the use of this product. Take any and all safety precautions when using this product. This system must be plugged into a UL approved GFCI outlet. The purchaser agrees to the above by purchasing this sytem. If you do not agree to these terms, please call us promptly to return your system for a full refund.

Fish Guaranteed!



855-FISH-LIGHT 855-347-4544 info@fishlight.com 20400 Veterans Blvd Port Charlotte, FL 33954 FISHLIGHT.COM





INSTRUCTION PAMPHLET & OWNER'S MANUAL

Dual Purpose Portable System

From Underwater Fish Light



